

light on your work

X-ECO - LED 6
6x150W 48V LED - 9M



TRIME

Lighting Tower Specialist



X-ECO - LED 6 6x150W 48V LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-ECO has been created beginning from these characteristics. It is the best solution to your needs and guarantees 3800 sqm of illuminated area. 14 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5m



920Kg



340°



3800 sqm



110(l)

- Multi-directionally adjustable and tiltable floodlights
- 6x150W, 48V LED lights
- 48V power between the generator and the lights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 14 units per truck
- Central lifting eye, longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- IP67 level protection certified
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up to 110 km/h
- 4 height adjustable stabilizers
- On board levels for guidance during stabilization
- Amoss safety breake

- ✓ **Transport costs Reduced by 45%**
14 Lighting Towers on a truck
- ✓ **45% Reduction**
in Yard Space
- ✓ **Kubota 1500 rpm 2 cyl water cooled diesel engine c/w 2 years warranty**
- ✓ **LED lamps**
mean NO replacement of
 - ✓ bulbs
 - ✓ lamp glass
 - ✓ ballast
 - ✓ capacitors**Reducing Call Out Costs**
- ✓ **LED Flood Light guaranteed for 50.000 hours**
- ✓ **Vertical mast with Life time warranty**



**Ease of transport
and handling**




**14
Units Per Truck**



**You can place 14 units on a
single vehicle thanks to one
of the compactest footprints
on the market.**

APPLICATIONS

-  *Gas, oil & mining operations*
-  *Special events*
-  *Rural & hard to reach areas*
-  *Emergency response*
-  *Construction & work sites*
-  *Military applications*

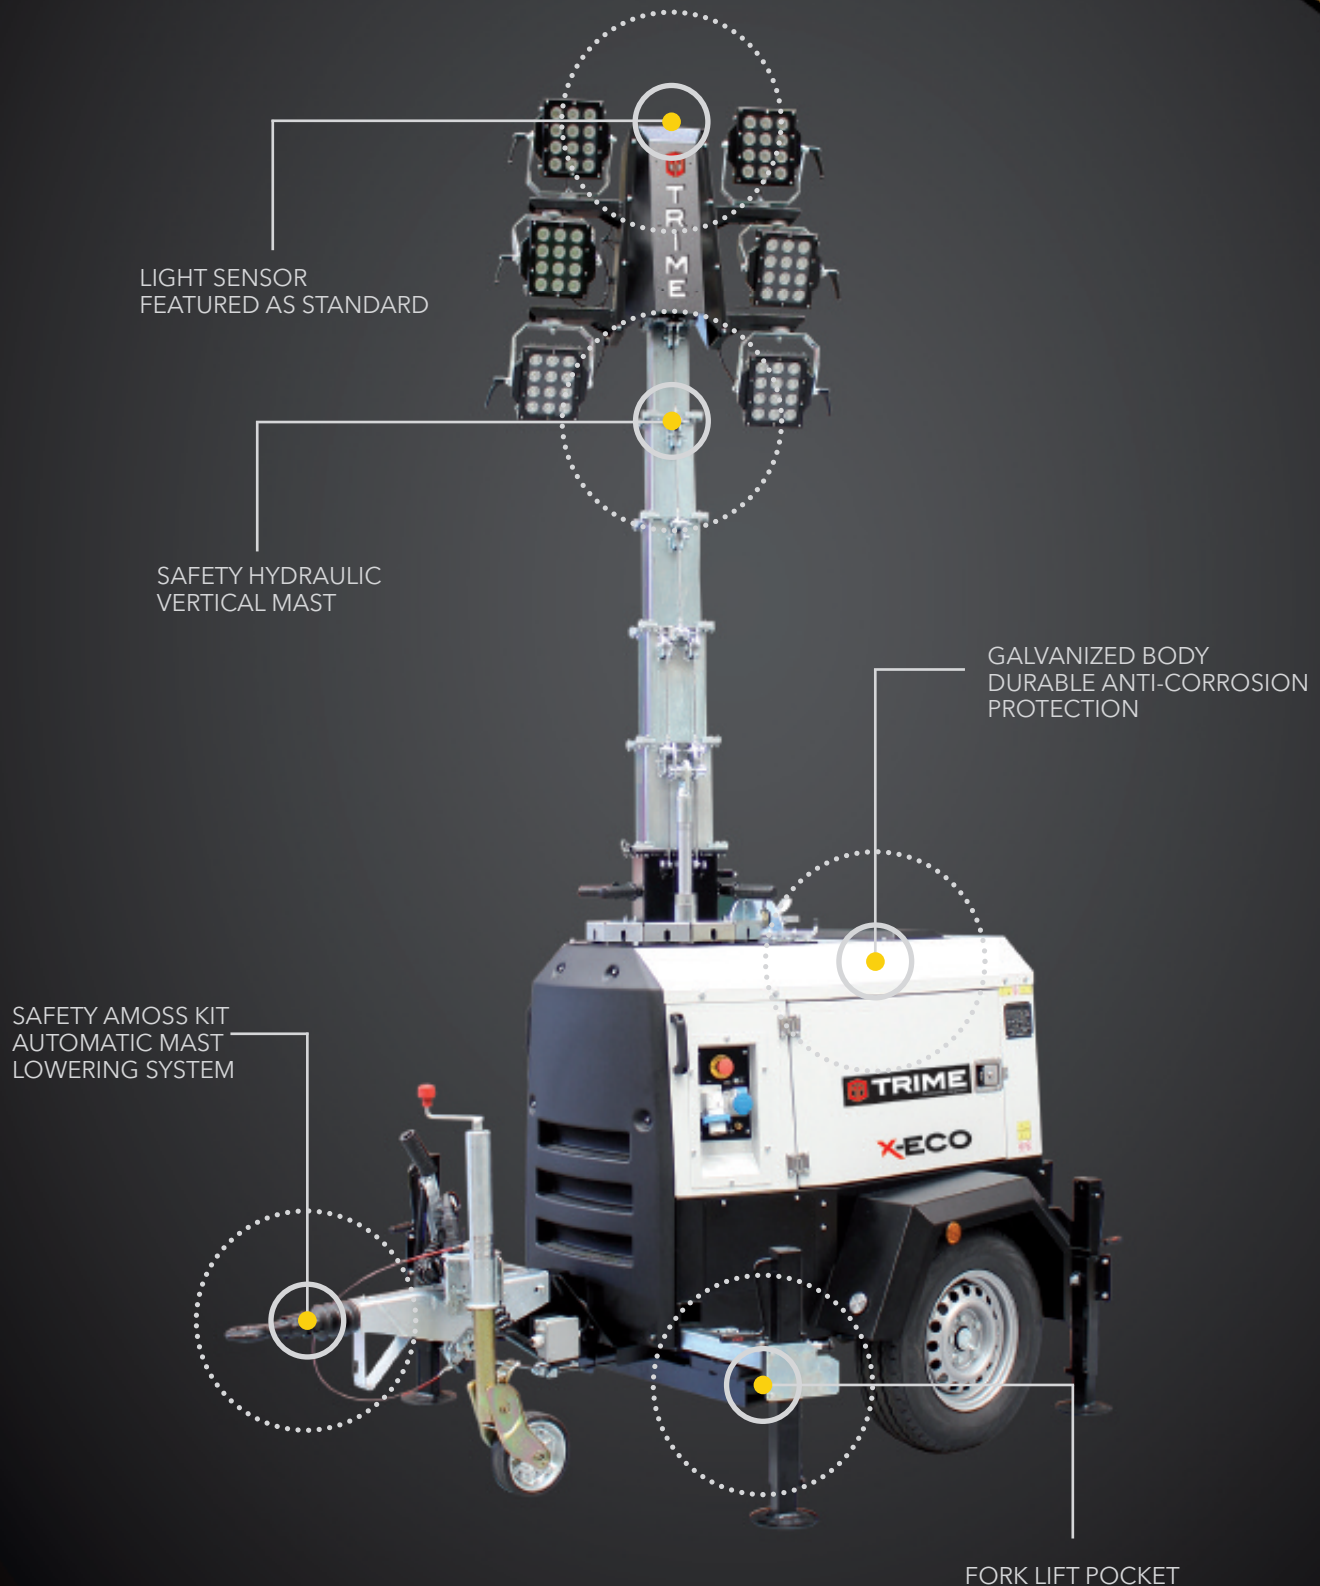

technical data

Dimensions & weight	
Dimensions min. (mm)	2320x1380x2420
Dimensions max. (mm)	2320x1550x8500
Total weight without fuel	920 Kg
Features	
Rotation	340°
Floodlights	6x150W
Lamps	LED
Options	Timer

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	1,2 kVA

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (l)	110
Running time (h)	200
Noise level (dBA) at 7m	65
Fuel Consumption	0,55 l/h

Standard load delivery


14 sets



Units Per Truck

Illuminated area (5 lux min.)

3800sqm

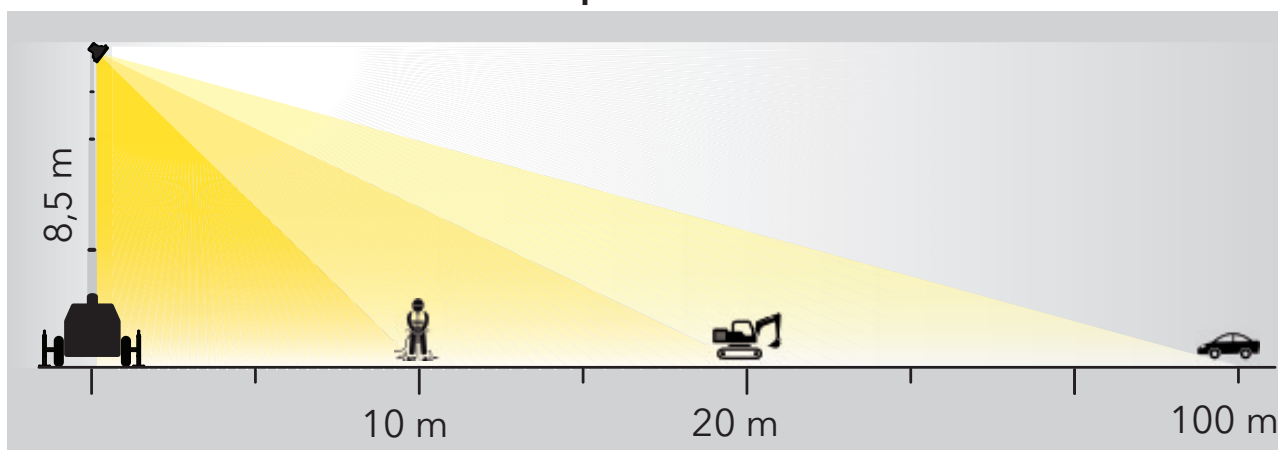

Headings	Standard Lighting Tower	X-ECO Lighting Tower	Monthly Savings when using X-ECO Light Tower
Fuel usage	1.93 l/h	0.55 l/h	1.38 l/h
Fuel costs per month	€ 550,00	€ 150,00	€ 400,00
CO'2 Omissionmonth	1.224 kg	336 kg	888 kg
Run time on full tank	60 h	200 h	140 h
Lamp type	Metal halide	LED	
Light sensor	Optional	Standard	
Amoss kit	Optional	Standard	

marcovitidesign®



TRIME s.p.a.

Strada per Robecco, snc
20081 Cassinetta di Lugagnano (MI)
Tel. +39 02 942 1724
www.trime.it - info@trime.it